


REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	F	ECO-15569	02/27/2026	TDUFRENE	DGUST

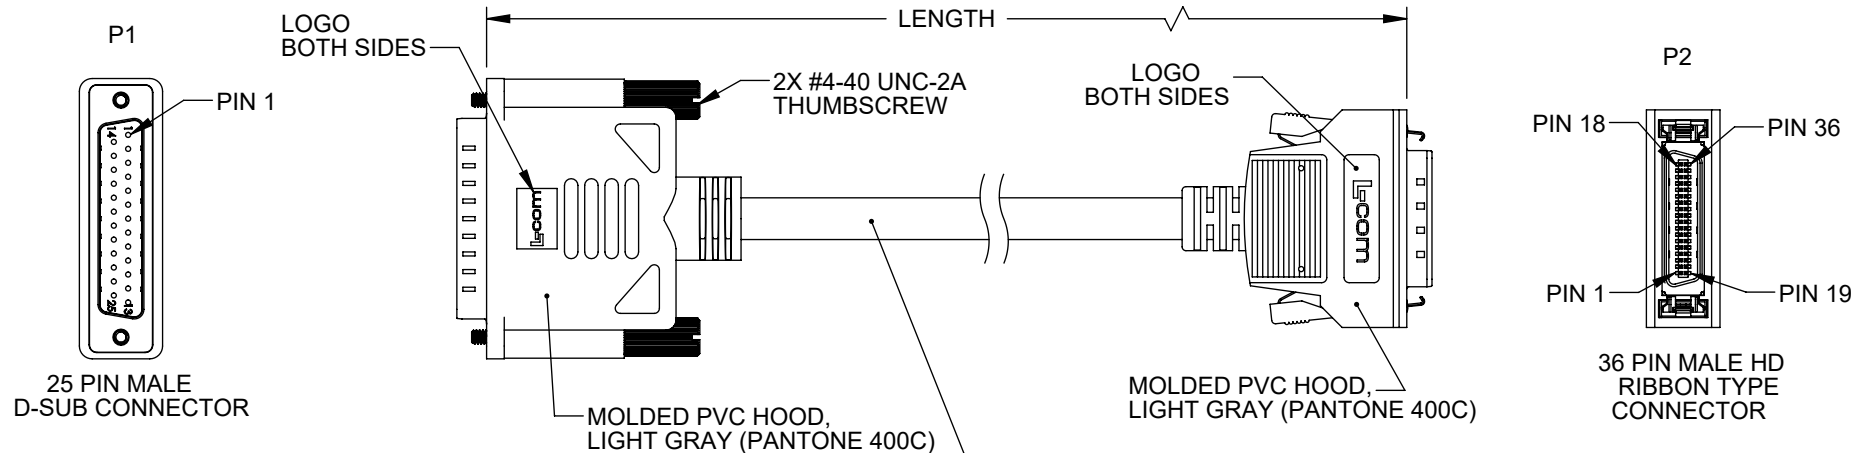

PART NUMBER	LENGTH	
	METERS	INCHES
CSM84AC-1M	1.0	39.37
CSM84AC-2M	2.0	78.74
CSM84AC-3M	3.0	118.1
CSM84AC-5M	5.0	196.9
CSM84AC-10M	10.0	393.7



NOTES:

1. CABLE ASSEMBLY SHALL COMPLY WITH THE REQUIREMENTS OF IEEE-1284 STANDARD.
2. HOOD MOLDINGS HAVE INTERNAL 360° FOIL SHIELDS SOLDERED TO THE METAL CONNECTOR FRAMES AND TO THE CABLE SHIELD.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:  
CE2011/65/EU(RoHS DIRECTIVE)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS	
TOLERANCES:	
.X = ±.2 [5]	FRACTIONS ± 1/32
.XX = ±.02 [0.5]	ANGLES ± 1°
.XXX = ±.005 [0.13]	
CABLE LENGTH TOLERANCES:	
≤12 [305]	= +1 [25] / -0
>12 [305] ≤ 60 [1524]	= +2 [51] / -0
>60 [1524] ≤ 120 [3048]	= +4 [102] / -0
>120 [3048] ≤ 300 [7620]	= +6 [152] / -0
>300 [7620]	= +5% / -0
ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE UN-DIMENSIONED/NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION COLORS MAY VARY	

 <b>an INFINIT@ brand</b> Website: www.L-com.com Phone: 1.800.341.5266   1.978.682.6936		 INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
		SCALE	SHEET
DESCRIPTION		NONE	1 OF 2
CBL, IEEE1284 DB25M/HP36M			
SIZE	CAGE CODE	DRAWN BY	ITEM NO.
A	43321	TJC	CSM84AC
			REV
			F